

KONS

IP42

IK04



Incl.



1 u.

2 u.




1 u.




— Installation —

Wall	Surface	✓
	Recessed	✗
	Flag	✓
Ceiling	Surface	✓
	Recessed	✗
	Suspended	✓

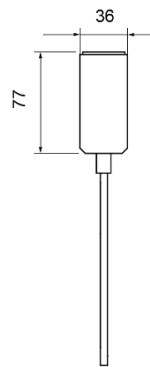

— Dimensions (mm) —

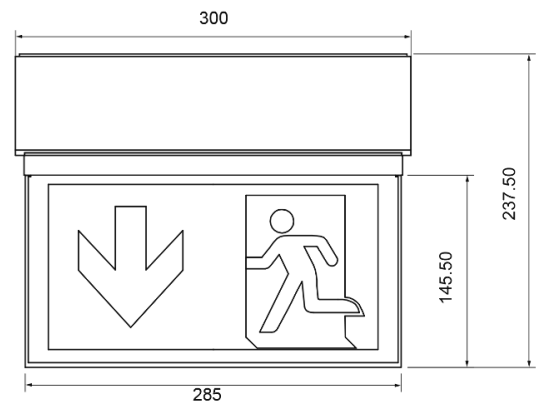

— Specification —

Body: Polycarbonate

IP42

IK04

Autonomy: 1 h, 3 h
Battery: LiFePO₄

Charging time: 12 h

Supply: 230V 50Hz

LED Colour temperature: 4000 K

Working temperature: 0/40 °C

AutoTest

DALI2

26 m


— Technical compliance —

EN-303-446-1 EN-60598-1 EN-60598-2-22
EN-62034 EN-62386

— Certifications —



— Range —

	Type*	Dur.	Battery	Part number
AutoTest	M/NM	1 h	3.2V-1.0Ah LiFePO ₄	LKS3070LXP
	M/NM	3 h	3.2V-1.5Ah LiFePO ₄	LKS3070LXP3
	M/NM	1 h	3.2V-1.0Ah LiFePO ₄	LKS9070LAP
	M/NM	3 h	3.2V-1.5Ah LiFePO ₄	LKS9070LAP3
Wireless SmartZ®	M/NM	1 h	3.2V-1.0Ah LiFePO ₄	LKS3070LWP
	M/NM	3 h	3.2V-1.5Ah LiFePO ₄	LKS3070LWP3



8

*M/NM: Maintained/Non Maintained. With a third terminal which allows to switch off/on the Maintained mode when connected to mains supply.

— Available colours —



For black version, add "N" at the end of the part number.


— Accessories —



AKS200
ACC. SUSPENSION KONS



CSZ003
SMARTZ CONTROL UNIT+ UPS
CSZ002+SAI002



ZWEBDALI2
CENTRAL DALI2