



— Installation —


Wall	Surface	✓
	Recessed	✗
	Flag	✓
Ceiling	Surface	✓
	Recessed	✗
	Suspended	✓

— Dimensions (mm) —

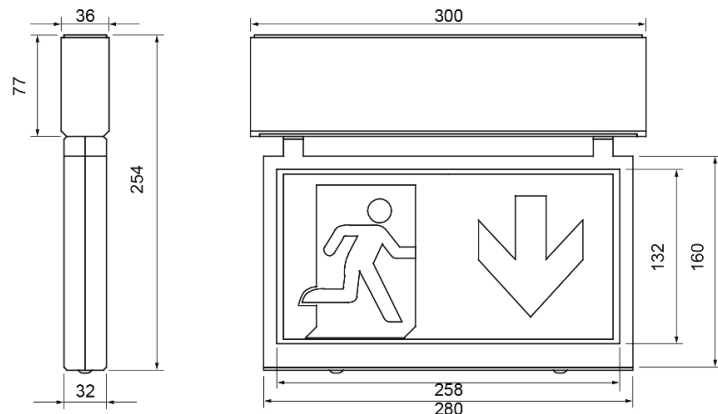


— Specification —

 Body: Polycarbonate

 IP42

 IK04

 Emergency: 50 ~ 120 lm
Mains: 50 ~ 70 lm

 Autonomy: 1 h, 3 h, 8 h
Battery: LiFePO₄

 Charging time: 12 h

 Supply: 230V 50Hz

 LED Colour temperature: 4000 K

 Working temperature: 0/40 °C

 AutoTest

  26 m 

— Technical compliance —

EN-303-446-1 EN-60598-1 EN-60598-2-22
EN-62034

— Certifications —

— Range —

	Emergency	Mains	Type*	Dur.	Battery	Part number
AutoTest			M/NM	1 h	3.2V-1.0Ah LiFePO ₄	LHS3070LXP
			M/NM	3 h	3.2V-1.5Ah LiFePO ₄	LHS3070LXP3
Wireless SmartZ®			M/NM	1 h	3.2V-1.0Ah LiFePO ₄	LHS3070LWP
			M/NM	3 h	3.2V-1.5Ah LiFePO ₄	LHS3070LWP3
			M/NM	8 h	3.2V-3.0Ah LiFePO ₄	LHS3070LWP8

HARENA WITH DOWNLIGHT

	Emergency	Mains	Type*	Dur.	Battery	Part number
AutoTest	120 lm	70 lm	M/NM	1 h	3.2V-1.5Ah LiFePO ₄	LHS3120LXP
	120 lm	70 lm	M/NM	3 h	3.2V-3.0Ah LiFePO ₄	LHS3120LXP3
Wireless SmartZ®	120 lm	70 lm	M/NM	1 h	3.2V-1.5Ah LiFePO ₄	LHS3120LWP
	120 lm	70 lm	M/NM	3 h	3.2V-3.0Ah LiFePO ₄	LHS3120LWP3
	50 lm	50 lm	M/NM	8 h	3.2V-3.0Ah LiFePO ₄	LHS3050LWP8



8

*M/NM: Maintained/Non Maintained. With a third terminal which allows to switch off/on the Maintained mode when connected to mains supply.


— Available colours —



For black version, add "N" at the end of the part number.

— Spacing table —

Calculated for reference LHS3120LXP (120 lm)

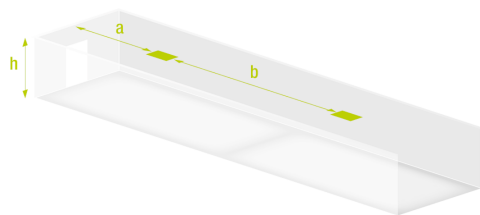

h	a	b
2 m	2,7 m	6,5 m
2.5 m	2,9 m	7,2 m
3 m	3,0 m	7,8 m
4 m	2,7 m	8,5 m
5 m	-	8,1 m


Spacing data calculated with no reflections and a maintenance factor of 0.9.

Compliant with the updated standard EN-1838:2024.

Minimum illuminance of 1 lux over a 1 m wide evacuation path.

The calculation of spacing distances is carried out considering the height of the light emission point, without taking into account the dimensions of the luminaire.

— Photometric guide —

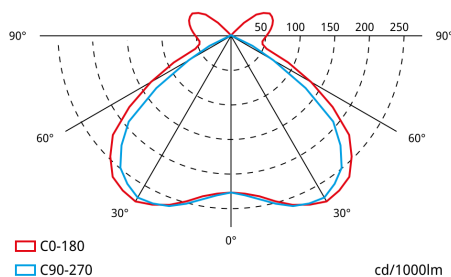

— Accessories —




AKS200
ACC. SUSPENSION KONS



APH022
PICT. HARENA
RED FIRE EXTINGUISHER



APH030
PICT. HARENA
RED PUSH BUTTON



APH031
PICT. HARENA
RED FIRE HOSE



CSZ003
SMARTZ CONTROL UNIT+ UPS
CSZ002+SAI002