

OUTLIGHT

IP65


IK10



WARRANTY

5
YEAR

— Dimensions (mm) —

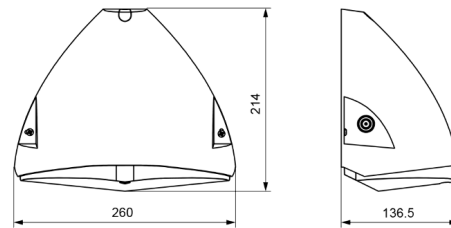

— Specification —

IP IP65

IK IK10

lm Emergency: 300 lm
Mains: 940 lm

Autonomy: 1 h
Battery: LiFePO₄

Charging time: 24 h

Supply: 220-240V 50/60Hz

LED Colour temperature: 3000 K

Working temperature: -5/40 °C

— Technical compliance —

EN-60598-1 EN-60598-2-22 EN-62034

— Certifications —

— Range —


	Emergency	Mains	Type*	Dur.	Battery	Part number
Self-Contained	300 lm	940 lm	M/NM	1 h	3.2V-1.5Ah LiFePO ₄	LOE3300LXP



*M/NM: Maintained/Non Maintained. With a switch which allows to select Maintained or Non Maintained mode function.

— Spacing table —

Calculated for reference LOE3300LXP (300 lm)

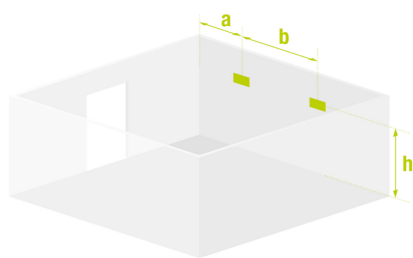

h	a	b
2.5 m	1,7 m	5,9 m
3 m	0,4 m	5,4 m
3.5 m	-	2,7 m
4 m	-	-
4.5 m	-	-

Spacing data calculated with no reflections and a maintenance factor of 0.9.
Compliant with the updated standard EN-1838:2024.

Minimum illuminance of 1 lux over a 1 m wide evacuation path.

The calculation of spacing distances is carried out considering the height of the light emission point, without taking into account the dimensions of the luminaire.

— Photometric guide —

