

SATURNO LIGHTING



IP66

IK07

IK09

IK10



SATURNO LIGHTING



E1 (300mm)



E2 (600mm)



E3 (1 200mm)




WARRANTY

5 YEAR

— Installation —

Wall	Surface	✓
	Recessed	✗
Ceiling	Surface	✓
	Recessed	✗

— Dimensions (mm) —

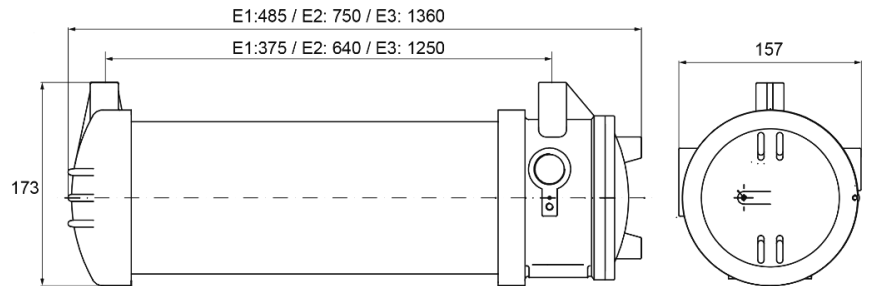

— Specification —



Body: Aluminum



Diffuser: Glass, Transparent Polycarbonate

IP

IP66

IK

IK07, IK09, IK10

lm

Mains: 1300 ~ 14100 lm



Supply:

220-240V 50-60Hz, 220-240V 50-60Hz / 220-240Vdc

LED

Colour temperature: 4000 K



Working temperature:

Polycarbonate: -20/50 °C, Enclosure: -20/55 °C



DALI2



Zone 1/Zone 21/Ex db IIC T6 Gb/Ex tb IIIC T85°C Db

— Technical compliance —

EN-60079-0 EN-60079-1 EN-60079-31 EN-60598-1
EN-62386

— Certifications —



ClassNK

— Range —

Glass Enclosure

	Dimensions	Mains	Part number
Illumination	E1	1400 lm	LSIVC1100
	E1	2500 lm	LSIVC1200
	E2	2750 lm	LSIVC2200
	E2	2750 lm	LSIVC22005
	E2	5350 lm	LSIVC2400
	E3	5750 lm	LSIVC3400
	E3	5750 lm	LSIVC34005
	E3	14100 lm	LSIVC3110
	DALI	E2	2850 lm
E3		5750 lm	LSIVC3400A
E3		14100 lm	LSIVC3110A

Polycarbonate Enclosure



	Dimensions	Mains	Part number
Illumination	E1	1300 lm	LSIPC1100
	E1	2400 lm	LSIPC1200
	E2	2600 lm	LSIPC2200
	E2	2600 lm	LSIPC22005
	E2	5100 lm	LSIPC2400
	E3	5500 lm	LSIPC3400
	E3	5500 lm	LSIPC34005
	E3	13600 lm	LSIPC3110
	DALI	E2	2600 lm
E3		5500 lm	LSIPC3400A
E3		13600 lm	LSIPC3110A

— Available colours —







For white version, add "B" at the end of the part number.

— Photometric guide —

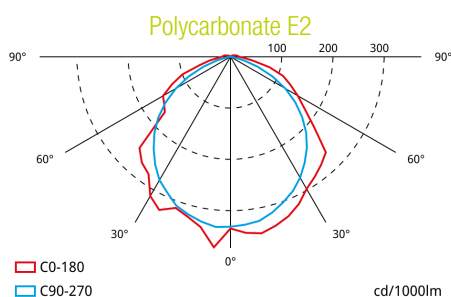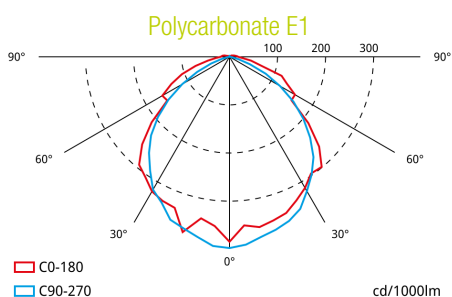

SATURNO LIGHTING

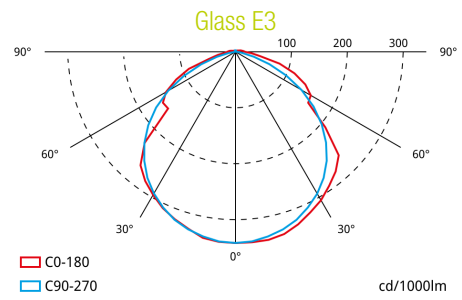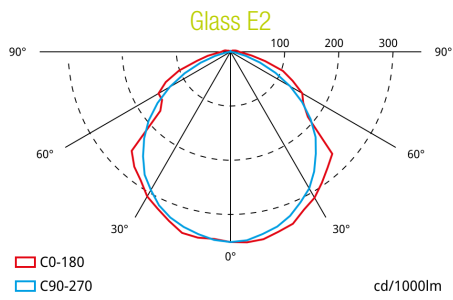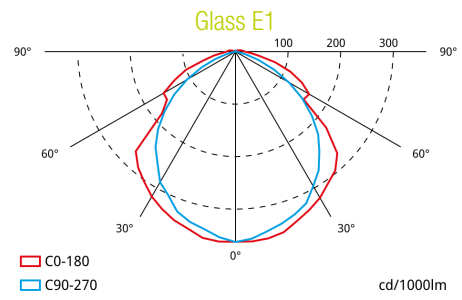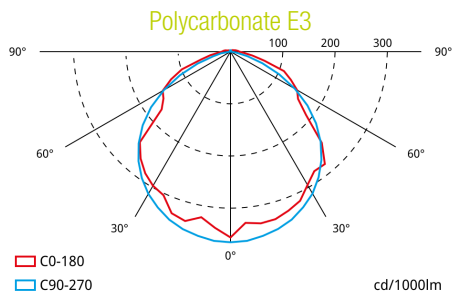

— Accessories —



BRD001
ACC. FIXATION FLANGE SATURNO



CAM001
RING BOLT FOR PENDANT MOUNTING



PSA001
ACC. CABLE GLANDS SATURNO



ZWEBDALI2
CENTRAL DALI2